
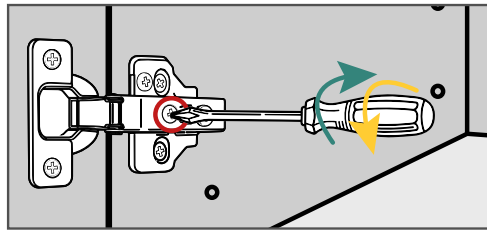


HINGE ADJUSTMENT | OUR HINGES OFFER 6-WAY ADJUSTMENTS

HINGE ADJUSTMENTS APPLY TO BOTH BASE AND WALL CABINETRY.


SIDE ADJUSTMENT (LEFT - RIGHT)

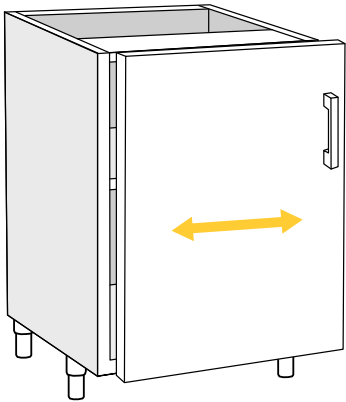



Rotate the center cam screw right to **INCREASE** or left to **DECREASE** gap between the doors. Adjustments must be made to both hinges.

APPLICATIONS:

- To reduce gaps between two butt doors
- Align door with side of drawer
- Straighten a slightly rotated door

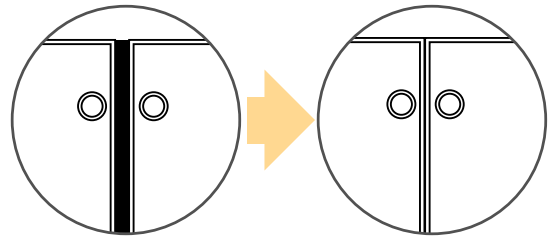


ELEVATION ADJUSTMENT (UP - DOWN)

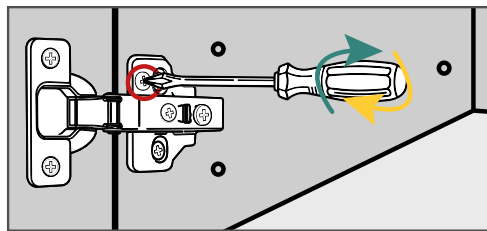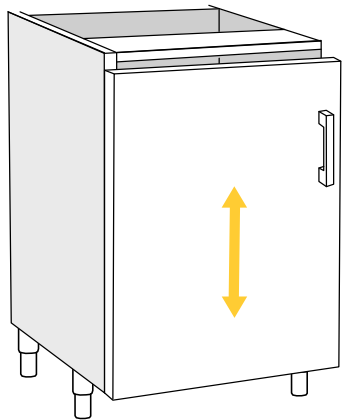



LOOSEN cam screw to adjust the door upward and **RE-TIGHTEN** screw to adjust the door downward. Adjustments must be made to both hinges.

Applications:

- Correct alignment of doors and drawers
- To help level the doors so reveals are consistent across the run

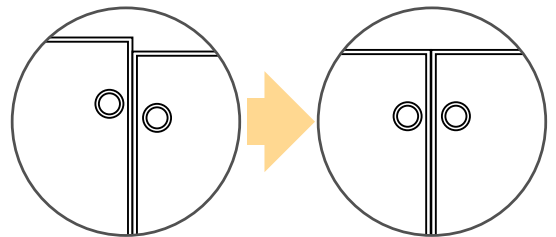

DOOR GAP ADJUSTMENT (IN - OUT)

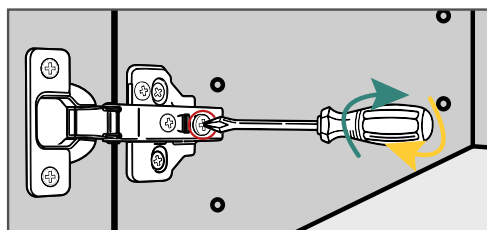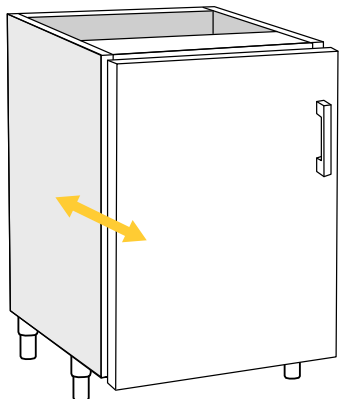

LOOSEN cam screw to decrease the door gap and **RE-TIGHTEN** screw to increase the door gap. Adjustments must be made to both hinges.

Applications:

- To ensure front face alignment
- Correct doors that have slight curvature due to incorrect hinge adjustment

